

P14000 230/115V 50Hz #MRS #HUK



Main Features

Frequency	Hz	50
Voltage	V	230/115
Power factor	cos ϕ	0.9
Phase		1

Power Rating

Emergency Standby Power ESP	kVA	12.96
Emergency Standby Power ESP	kW	11.66
Continuous power COP	kVA	10.63
Continuous power COP	kW	9.57

Ratings definition (According to standard ISO8528 1:2005)

Engine specifications

Engine Brand	Yanmar	
Model	3TNM74F-NHPGE	
[50Hz] Exhaust emission level	Stage V	
Engine cooling system	Water	
Displacement	cm ³	993
Aspiration	Natural	
Operating Speed-Nominal	rpm	3000
Speed governor	Mechanical	
Fuel	Diesel	
Oil capacity	l	3.4
Coolant capacity	l	1
Starting system	Electric	
Electric circuit	V	12



Alternator Specifications

Type	Brushless	
Class	H	
IP protection	23	
Poles	2	
Frequency	Hz	50
Voltage	V	230
Voltage regulation system	Capacitor	
Voltage tolerance	%	2



Dimensional data

Length	(L) mm	1500
Width	(W) mm	754
Height	(H) mm	1032
Dry weight	kg	425.5
Fuel tank capacity	l	51



Autonomy

Fuel consumption at 75% of Load	l/h	3.28
Fuel consumption at 100% of Load	l/h	4.65
Running time at 75% of load	h	15.55
Running time at 100% of load	h	10.97



Noise level


Guaranteed noise level (LWA)	dB(A)	95
Noise pressure level @ 7 m	dB(A)	66



Genset equipment

STEEL SUPPORTING FRAME:

- Sturdy Supporting Frame for moto-alternator and canopy.
- Anti-vibration mounting properly sized.

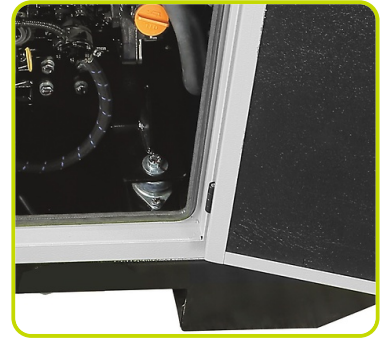

FULLY BUNDED BASEFRAME:

- Base forcable by forklift.
- Welder base with drainage point
- Big fuel integrated tank for an increased autonomy.
- Fuel level sensor.
- Fuel refiling point external for simple and rapid refueling operations (cap with key available as an accessory)




EASY AND FAST MAINTENACE SERVICE:

- Designed to access all components by opening the roof (opening and closing with safety key).
- Side door for engine service and maintenance (opening with locking system from inside the compartment)
- Oil draining pipe with cap.



ENGINE COMPLETE WITH:

- Battery
- Liquids (No Fuel)
- Water temperature sensor
- Lube oil pressure sensor

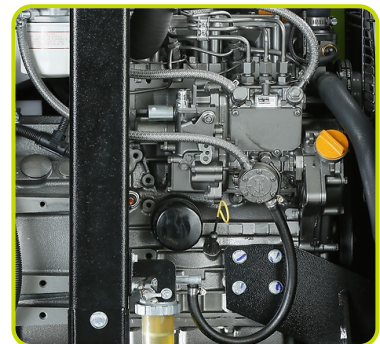

CANOPY:

- Modular type canopy designed for easy access to all components using only one side
- Weatherproof enclosure made of galvanized sheet metal.
- Noise attenuation thanks to high quality soundproofing material.
- Efficient residential silencer placed inside the canopy
- Single lifting points for easy Handling.



GENSET CONTROL:

- User friendly manual/remote start panel.
- Complete genset control and protection.
- Prepared for remote control
- Protection cover in plexiglass for controller

GENSET CONTROL PANELS

Mounted on the genset, complete with digital control unit or monitoring, control and protection of the generating set.

CONTROL SECTION

- CONTROL UNIT with Key 3 positions: OFF, ON local start, REM remote start.
- Voltage Selector Switch 230/115V
- 2-wire remote start/stop (REM)
- CONNector for RSS Remote Start Stop Wireless (accessory available).
- Horn Alarm

CONTROL UNIT

- Display: LCD with icons (52x35mm)
- Genset parameters: V- Hz – RPM – A (1Phase) – kVA – kWe – Fuel level (%)
- Parameters control and/or firmware transferring through NFC smart connect

PROTECTIONS

- Circuit breaker
- Genset Protection: Over load – current – voltage, High Coolant temperature, Low Oil pressure – Low fuel level.
- Emergency push button



SOCKET TYPE

2P+T CEE 115V 16A IP44	2
2P+T CEE 115V 32A IP44	4
2P+T CEE 230V 16A IP44	1

SUPPLEMENTS CONTROL (Available when ordered)

PHS– Coolant pre-heating system

The coolant preheating system allow to mainain the engine at a temperature that ensures a quick start when required. Immersion heater 400W.



ACCESSORIES CONTROL PANEL

RSS - REMOTE START / STOP

RSS Remote start/stop wireless with CONNector (max Distance 90m)



ACCESSORIES

FCK - Fuel cap with key



STR - Site Trailer

