

PMD 5000S



Diesel and soundproof motorization stand for reliability with low operating cost in the maximum comfort. Handle and wheels allow easy move and transportation. Generous fuel tank capacity allows for long continuous running time. Built-in digital multimeter for scheduled maintenance intervals and ensure optimal operating condition. Automatic Voltage Regulator (AVR) allows for tension stability. Connector for Pramac Automatic Transfer Switch (ATS) to electrical grid - optional. Power coated finish helps to prevent corrosion in all weather conditions.

FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Diesel
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track diesel levels
- AVR Automatic Voltage Regulator
- Equipped with 4 wheels for move and transport easily
- Central lifting point
- Optional Automatic Transfer Switch For an optimal home safety



PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	5000
Rated Power	Watts	4500



Engine

Brand		Pramac
Type		OHV
Operating Speed Nominal	rpm	3000
Fuel		Diesel
Starting Systems		Electric
Oil capacity	l	1.65
Low Oil Shutdown		√




Alternator

Voltage regulation system		AVR
---------------------------	--	-----

Dimensional data

Length	(L) mm	910
Width	(W) mm	518
Height	(H) mm	682
Dry weight	kg	165
Carton box dimension LxWxH	mm	950x570x765

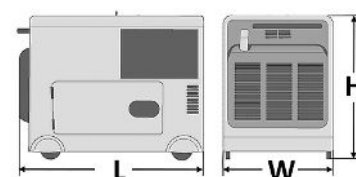

Autonomy

Fuel tank capacity		14.5
Fuel consumption 50%	l/h	1.28
Running time 50%	h	11.3



Noise level

Guaranteed noise level (LWA)	dB(A)	97
------------------------------	-------	----

CONTROL PANEL

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS:

- Start selector switch with key: OFF - ON - START

INSTRUMENTATION

- Voltmeter
- Hours-counter
- Frequency meter
- Fuel gauge

PROTECTIONS:

- Thermal Magnetic breaker
- Oil Guard (with lamp)
- Fuse 9A (12V DC)

OUTPUT:

- Battery Charger 12V DC
- PE screw
- Connector for ATS (Accessory available)



SOCKET TYPE

SCHUKO 230V 16A IP44	1
2P+T CEE 230V 32A IP44	1

The information is aligned with the Data file at the time of download. Printed on 22/07/2022 (ID 17780)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

